




Technical data	
Dimensions (W × H × D)	45 × 115 × 73 mm
Housing	D10
Number of inputs	2
Main transformer	Equal
Weight	400 g

Drawings and views

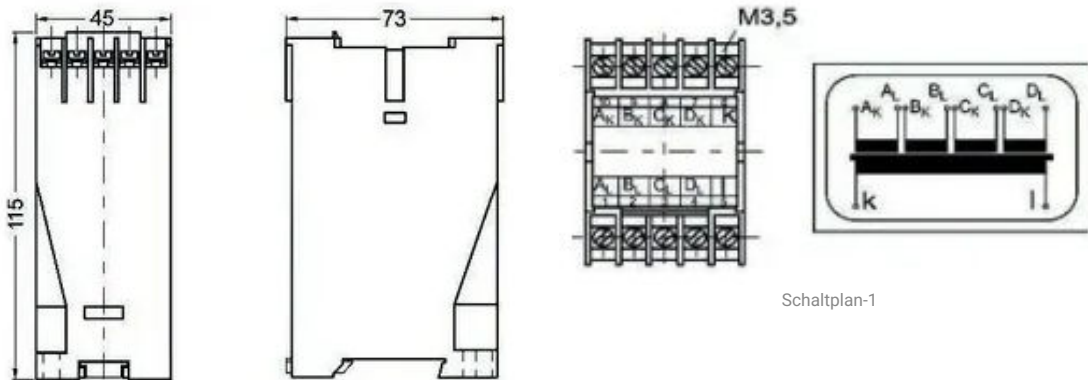

Masszeichnung-1

Types			
Output	Cl.	Rated current A	
		1	5
1A	0.5	15 VA 70097-4110	—
	1	15 VA 70097-4065	—
5A	0.5	15 VA 70097-4297	15 VA 70097-4059
	1	—	15 VA 70097-4057

Electrical properties	
Max. Rated voltage	720 V
Test insulation voltage	4 kV, 1 min.
Rated short-time thermal current (I _{th})	60 x I _N
Dynamic rated current (dyn)	2.5 x I _{th}
Frequency	50 - 60 Hz
Self-consumption	Max. 4 VA
Installation class	E

Mechanical properties	
Housing	Made of self-extinguishing ABS UL94 V-0
Degree of protection	IP40
Mounting	DIN rail DIN EN50022 or screw mounting
Connections	Nickel plated with plus-minus screws
Degree of protection of the terminals	IP 10, with terminal cover = IP20 (option)
Max. Ratio for unequal main transducers	1:10