




Technical data	
Dimensions (W × H × D)	100 × 115 × 73 mm
Housing	D20
Number of inputs	9
Main transformer	Equal
Weight	600 g

Drawings and views

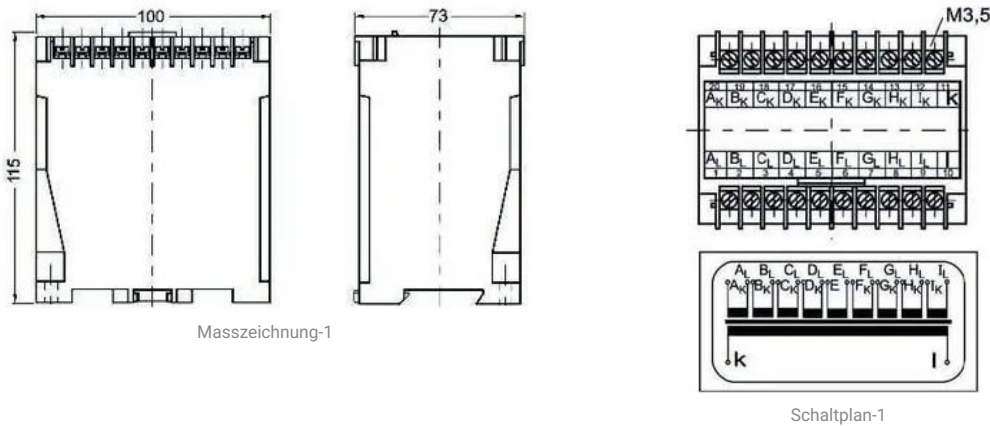

Types			
Output	Cl.	Rated current A	
		1	5
1A	0.5	15 VA 70097-4277	—
	1	15 VA 70097-4234	—
5A	0.5	—	15 VA 70097-4278
	1	—	15 VA 70097-4279

Electrical properties	
Max. Rated voltage	720 V
Test insulation voltage	4 kV, 1 min.
Rated short-time thermal current (Ith)	60 x IN
Dynamic rated current (dyn)	2.5 x Ith
Frequency	50 - 60 Hz
Self-consumption	Max. 4 VA
Installation class	E

Mechanical properties	
Housing	Made of self-extinguishing ABS UL94 V-0
Degree of protection	IP40
Mounting	DIN rail DIN EN50022 or screw mounting
Connections	Nickel plated with plus-minus screws
Degree of protection of the terminals	IP 10, with terminal cover = IP20 (option)
Max. Ratio for unequal main transducers	1:10