





- Article features
- Very compact
 - Excellent for retrofitting, as the primary circuit does not have to be interrupted
 - Especially suitable for digital measuring instruments
 - Super fast and easy installation
 - Transformer secured by UV-resistant cable ties
 - This cable conversion current transformer is supplied with multi-colour coded connection leads

Technical data	
Round conductor	Ø 18 mm
Dimensions (W × H × D)	35.6 × 50.4 × 36 mm
Rated current	60, 75, 100, 125, 150, 200, 250 A
Instrument security factor	FS 5

Drawings and views

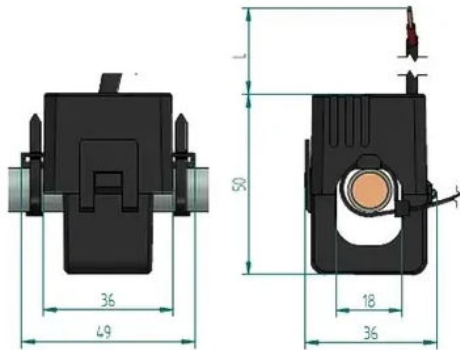

Masszeichnung-1

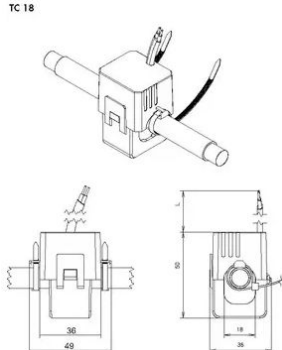

Masszeichnung-2



Auf

Types								
Output	Cl.	Rated current A						
		60	75	100	125	150	200	250
1 A	1	–	–	–	–	–	0.2 VA 70006-1006	0.2 VA 70006-1007
	3	0.2 VA 70006-1001	0.2 VA 70006-1002	0.2 VA 70006-1003	0.2 VA 70006-1004	0.2 VA 70006-1005	–	–
333 mV	3	70006-1070	–	70006-1071	–	–	–	–

Conditions of use	
Normative standards	IEC 61869 part 1 + 2
Rated short-time thermal current	I _{th} = 60 x I _{pr} / 1 s
Rated continuous thermal current	I _{cth} = 1
Rated insulation level	0,72/3/-kV
Rated frequency	50 - 60 Hz
Insulation class	E / F / H

Environmental conditions	
Installation location	Indoor use
Ambient temperature	-10°C ... +55°C
relative humidity	5% ... 85%, no condensation
Altitude	up to 2000 m
Protection class (secondary terminals)	IP20
Remark	Only suitable for insulated conductor