



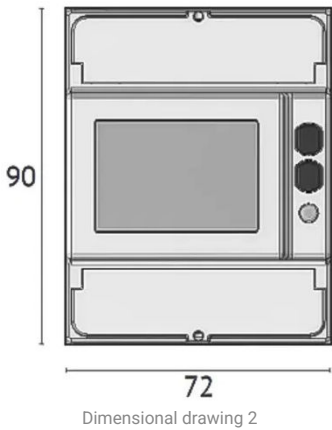

- 80A three-phase energy meter with built-in communication
- Certified MID version
 - For RS485 Modbus RTU/ASCII communication
 - Direct connection up to 80 A
 - Fully bidirectional four-quadrant measurements for all energies and powers
 - For 4-wire networks with balanced or unbalanced load
 - Class B according to EN 50470-3
 - S0 output for energy pulse delivery

Technical data			
Article no.	70143-1212	Meter type	elektronisch
Mounting	DIN-Schiene	Display type	LCD
Interface	Modbus RTU	Max. current	27 A
Measurement	Direktmessung	Rated current	0 - 80 A A
Web server	without web server	Mounting	DIN-Schienen Montage
Phases	Dreiphasig	Display digits	8
Display	digital	EAN	9502244522399

Drawings and views

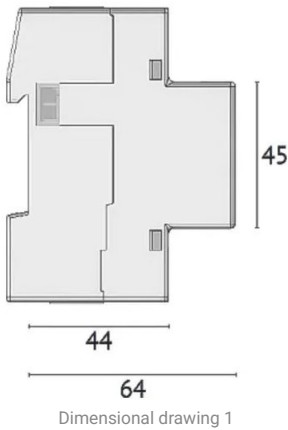

Documents	
• Instruction manual	