



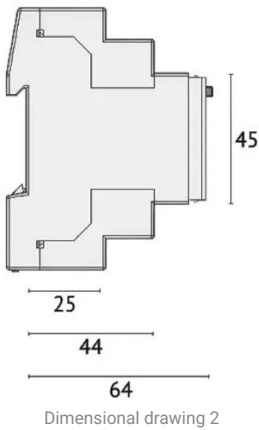

- 40A single-phase energy meter with built-in communication
- Certified MID version
 - For RS485 Modbus RTU communication
 - Direct connection up to 40 A
 - Fully bidirectional 4-quadrant measurements for all energies and powers
 - High reliability
 - 1 DIN module compact size
 - Quick installation
 - S0 output for energy pulse delivery
 - LCD display with 7 main digits.

Technical data			
Article no.	70143-1012	Meter type	elektronisch
Mounting	DIN-Schiene	Display type	LCD
Interface	Modbus RTU	Max. current	27 A
Measurement	Direktmessung	Rated current	0 - 40 A A
Web server	without web server	Mounting	DIN-Schienen Montage
Phases	Einphasig	Display digits	7
Display	digital	EAN	9505341314881

Drawings and views

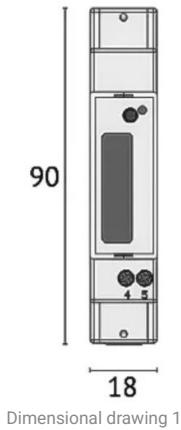

Documents	
• Instruction manual	